



Designed to protect



CABLE MANAGEMENT

Cable management

RoofSupport is the solution for safe and sustainable cable management in solar projects. Thanks to its click connection, installation is quick, simple, and efficient. Due to its robust construction and material, manufactured from high-quality steel with an EZ1000 surface treatment, the system offers high corrosion resistance and contributes to a reduced CO₂ footprint.

Cables between solar panels and inverters are structured and installed safely with RoofSupport in accordance with IEC 60364, ensuring optimal protection against mechanical stress and weather conditions. The system is storm-resistant, cost-efficient, and ideal for both residential and commercial projects. Choose RoofSupport and experience a hassle-free installation that meets the highest standards of safety and sustainability.

Why RoofSupport?

- Structured and secure installation of cable infrastructure.
- Complete kits available under a single item code.
- A proven product with more than 15 years of resistance to storm damage.
- Manufactured from steel with an EZ1000 surface treatment.
- Ultra-fast assembly/no tools required.
- Wind certified.
- Guaranteed potential equalisation up to 100 metres.
- Contributes to a reduced CO₂ footprint.



EZ1000 Surface Treatment

Thanks to its robust construction and the use of high-quality steel with an EZ1000 surface treatment, this material offers excellent corrosion resistance and durability. The special coating provides a high level of corrosion resistance (class 8), making it highly suitable for long-term applications, even under harsh weather conditions.

In addition, the coating has self-healing properties: after cutting or damage, no zinc spray is required, as the protective layer restores itself automatically. This combination of material and finishing contributes to a long service life of PV installations and reliable long-term performance.



The system

RoofSupport combines corrosion-resistant wire mesh cable trays from 60 mm to 600 mm in width with UV-resistant roof supports for a fast, safe, and error-free installation. Thanks to its robust construction and the materials used, manufactured from high-quality steel with an EZ1000 surface treatment, the system is durable and reliable.

Whether for large commercial projects or residential applications, with a wide range of roof supports, RoofSupport offers a suitable solution for every situation. Thanks to the CLICK connection, RoofSupport is easy to install without tools.

Wind certificate

Thanks to the open design of the RoofSupport wire tray system and the concrete-weighted roof supports, the systems are highly wind-resistant.

The wind resistance has been extensively tested in the Peutz wind tunnel and certified according to Peutz guidelines.

With the obtained certification and accurate calculations, RoofSupport is guaranteed to be suitable for all common applications.



Learn more about
the wind certificate:



Wire tray

RoofSupport is manufactured from steel with an EZ1000 surface treatment and is equipped with factory-fitted couplings. This prevents damage to cabling, as no burrs or flakes are created during production. Thanks to its robust construction and the materials used, RoofSupport offers a durable and reliable solution. With its excellent corrosion resistance, comparable to stainless steel, RoofSupport is suitable for a wide range of applications, even in coastal areas.

Width (mm)	Height (mm)	Item number
30	35	226113
60	65	2/17354
100	35	226114
100	65	2/17355
150	65	2/17356
200	65	2/17357
300	65	2/17358
400	65	2/17359
500	65	2/17361
600	65	2/17362



Roof Support

The roof supports from RoofSupport provide robust and durable support for various applications. The RS RoofBlock, weighing 1 kg, is ideal for lightweight projects. For heavier applications, the RS RoofBlock XL, with its weight of 3.5 kg, ensures optimal stability. Additionally, the RS MountBlock is a flat model designed for mounting on a wall or steel roof. All roof supports are made from UV-resistant materials, ensuring they withstand prolonged exposure to sunlight without quality loss. They do not require fixation to the roof surface, making them suitable for a wide range of roof types.

RS RoofBlock	RS RoofBlockXL	RS MountBlock
		
item no.: RSC102011	item no.: RSXL102011	item no.: RSMB102011

Cover

For a neat finish and extra protection, RoofSupport offers covers in widths ranging from 60 to 600 mm, thanks to their robust construction and the use of high-quality steel with a Zn-Al-Mg coating. Ideal for visible roofs or to protect cables from UV radiation, these covers ensure a tidy appearance and reduce cable exposure to sunlight. The covers are available on request in any desired RAL colour.

Please note: from 100 mm cover width onwards, cover clamps are mandatory.

Width (mm)	Item number
60	227520
100	227974
150	227975
200	227976
300	227977
400	227978
500	227979
600	227980



Complete sets



RoofSupport offers sets with 60 mm and 100 mm wide wire trays, including RoofBlock roof supports, packaged as a 12-metre set in a single box with one item number. For smaller commercial or residential applications, there is RS HOME, consisting of 3 metres of wire tray (35 x 30 mm) and 2 roof supports. Perfect for projects with up to 4 DC circuits.

Set description	Item number
Complete wire tray set 65 x 60 with UV-resistant roof supports. Total length: 12 metres.	RSC6560-12M
Complete wire tray set 65 x 100 with UV-resistant roof supports. Total length: 12 metres.	RSC65100-12M
Complete wire tray set RS HOME 30 x 35 with UV-resistant roof supports. Total set length: 3 metres.	RSH3035-3M

Placement advice

For a safe and efficient installation of the RoofSupport system, it is important to position the roof supports correctly. Follow the placement advice carefully to ensure a stable, secure, and durable solution.

- **RS RoofBlock:** Suitable for wire cable trays with widths of 60, 100, and 150 mm. Install these 1 kg roof supports every 1.20 meters and adhere to the recommended number of cables for optimal load capacity and wind certification.
- **RS RoofBlockXL:** Designed for wider wire cable trays ranging from 200 to 600 mm. Thanks to its 3.5 kg weight, these supports can be installed every 2 meters, reducing the number of supports required and lowering costs. Follow the recommended number of cables for optimal load capacity and wind certification.
- **RS MountBlock:** Suitable for wire cable trays with widths of 60, 100, and 150 mm. This flat roof support for wall and roof mounting is specifically designed for fast and secure installation of wire cable trays on trapezoidal roofs or walls.

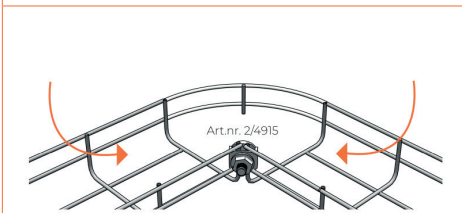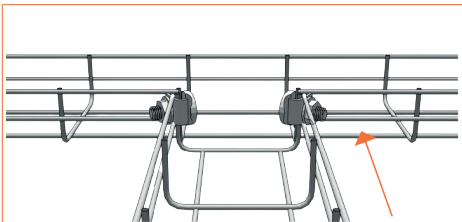

Couplings

The machine-fitted couplings on each wire tray section ensure a tool-free click connection. With consistent quality in the couplings, potential equalisation is guaranteed up to 100 metres, while the high installation speed is a significant advantage.

- **Reinforced Coupling**

The reinforced coupling, made of stainless steel, is used for connecting wire trays at right angles and securing bent sections.

Item number: 2/4915

- **Bend Coupling**

The adjustable bend coupling, made of stainless steel, is used for securing wider bends in curved sections and for connecting wire trays on curved roofs.

Item number: 2/5093

Accessories

Complete your installation with our range of accessories. Below is a selection, visit conduct.nl for the full overview.

	Description	Art.nr		Description	Art.nr
	Central Hanging Bracket 60 mm Central Hanging Bracket >100 mm	2/0340 2/0373		Reinforced Coupling Stainless Steel 304	2/4915
	Step-Over 80 x 100 cm Step-Over 80 x 120 cm	RSSO80100 RSSO80120		Bend Coupling Stainless Steel 304	2/5093
	Fire Wall Bracket for 150, 200, 300, 400 & 500 mm Fire Wall	RS.BWB.150 RS.BWB.200 RS.BWB.300 RS.BWB.400 RS.BWB.500		Ceiling Support CLICK Console HD 100 mm	2/7244
	FireWrap 400 x 420 mm	FW4042		Side Bracket for Wire Tray 65x60 & 65x100 mm HD	2/0370
	Wire Tray Cutter	2/5066		Wall Support HD 100 mm Wall Support HD 150 mm Wall Support HD 200 mm Wall Support HD 300 mm	2/7239 2/7240 2/7241 2/7242
	RoofSupport Warning Sign Fall Hazard	RS.FS100721		Distance Support SV HD 100 mm	2/1050
	RoofSupport Warning Sign Trip Hazard	RS.TS100721		Separator 35 mm Separator 60 mm	2/3479 2/3480
	Cover Clip Stainless Steel 304 Please note: from 100 mm cover width onwards, cover clamps are mandatory.	2/10254		Acid-Resistant Kit Grey (for synthetic roofing) Bituminous Kit Black (for bitumen roofing)	RS17072 RS17073

Conduct thinks along

At Conduct, customer service and support are at the core of everything we do. Whether it's about innovative solutions, custom projects, or delivering the best service, Conduct is here to provide support.

Total solution

Conduct offers a total solution by combining the product groups PVshelter, RoofSupport, PVbox, PVtube, and SolarCable. This ensures a reliable, fire-safe, and efficient solar panel installation.

Ordering

Conduct's product range is available through various distributors across Europe. Scan the QR code below for a full list of our partners and to access sales points directly.

Contact

Feel free to email us at info@conduct.nl or contact us by phone at +31 (0) 180 - 53 11 20. Conduct is available Monday to Friday from 08:30 to 17:00 and is happy to assist with any questions you may have.

FIND DISTRIBUTOR



Conduct Technical Solutions BV

Fennaweg 24, 2991 ZA Barendrecht
The Netherlands

+31 (0) 180 53 11 20 | info@conduct.nl | conduct.nl/en



CONDUCT
TECHNICAL SOLUTIONS